

LCH T-REX

2026



**PASSENGER CAR TYRE
PRODUCT BROCHURE**

LCH T-REX

QINGDAO TIGA TYRE CO.,LTD

Add: East office building, no.45 beijing road, Qingdao, Shandong, China.

Email: info@tigatyre.com

Web www.tigatyre.com

PRODUCT POSITIONING



COMFORT HP

High Performance



Shock absorption and comfortable



Strong braking performance



Silent noise reduction



Environmentally friendly



PROXES UHP

Ultra High Performance



Strong controllability



Strong braking performance



Silent noise reduction



Environmentally friendly



PREMIUM HT

Highway Terrain



Shock absorption and comfortable



Wear-resistant and durable



Economical and fuel-saving



Wet road safety



CARGO VAN

Commercial



Ultra-long mileage



Wear-resistant and durable



Economical and fuel-saving



Super strong load-bearing



X-ATPRO

All-Terrain



Wear-resistant and durable



Wet and dry all-purpose



Silent noise reduction



Stable grip



RAZR HP

High Performance



Shock absorption and comfortable



Strong braking performance



Silent noise reduction



Environmentally friendly



C-PRO

Commercial



Ultra-long mileage



Wear-resistant and durable



Economical and fuel-saving



Super strong load-bearing



MUD MONSTER

All-Terrain



Wear-resistant and durable



Wet and dry all-purpose



Silent noise reduction



Stable grip

PRODUCT POSITIONING



AT100



EXTREME PRO



CUSTOM 07



ALL-TERRAIN A/T



RURAL BLOCK



SAFARI A/T



RM-777



ALL-TERRAIN T/A



DEPREDADOR



SP ROAD GRIPPER S



RADIAL G/T



MT-05



LIGHTEN YOUR LIFE AND MAKE YOUR JOURNEY EASIER

COMFORT HP


HIGH PERFORMANCE

SAFER DRIVING IN WETLANDS

Four wide longitudinal main grooves provide excellent drainage performance and improve the tire's wet handling performance.

POWERFUL CONTROL

The transverse groove inclination increases the tire's contact area, and combined with the reinforced sidewall, it responds promptly, allowing you to start without fear of high torque, one step ahead and move forward courageously.

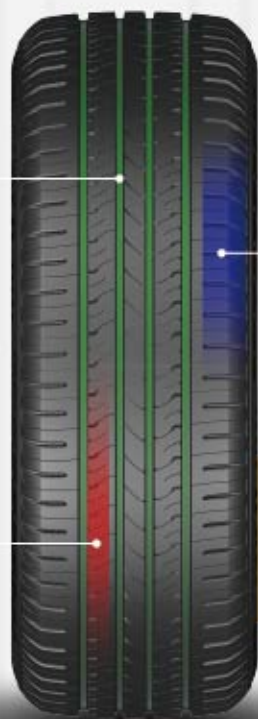

EV

EXCELLENT QUIET COMFORT

The variable pitch staggered pattern design effectively reduces the impact noise of the tread blocks touching the ground.

The green, environmentally friendly and energy-saving tread formula significantly improves the tire's anti-skid performance, effectively reduces rolling resistance, and improves tire wear performance and mileage.

COMFORT HP

Green high-performance tires

In	Size	Load Index /Speed	S.W	O.D	RIM	Kg	LBS	KPA	PSI	UTQG
13	175/60R13	77T	177	540	5.00B	412	908	300	44	420 A A
	155/65R13	73T	157	532	4.50B	365	805	300	44	420 A A
	165/65R13	77T	170	544	5.00B	412	908	300	44	420 A A
	155/70R13	75T	157	548	4.50B	387	853	300	44	420 A A
	165/70R13	79T	170	562	5.00B	437	963	300	44	420 A A
	175/70R13	82T	177	576	5.00B	475	1047	300	44	420 A A
	185/70R13	86T	189	590	5.50B	530	1168	300	44	420 A A
	155/80R13	79T	157	578	4.50B	437	963	300	44	420 A A
14	165/60R14	75T	170	554	5J	387	853	300	44	420 A A
	175/60R14	79H	177	566	5J	437	963	300	44	420 A A
	185/60R14	82H	189	578	5.5J	475	1047	300	44	420 A A
	195/60R14	86H	201	590	6J	530	1168	300	44	420 A A
	155/65R14	75T	157	558	4½J	387	853	300	44	420 A A
	165/65R14	79T	170	570	5J	437	963	300	44	420 A A
	175/65R14	86T XL	177	584	5J	530	1168	340	50	420 A A
	185/65R14	86H	189	596	5.5J	530	1168	300	44	420 A A
	165/70R14	81T	170	588	5J	462	1019	300	44	420 A A
	175/70R14	84T	177	602	5J	500	1102	300	44	420 A A
	185/70R14	88T	189	616	5½J	565	1246	300	44	420 A A
	195/70R14	91T	201	630	6J	615	1356	300	44	420 A A
15	205/70R14	95T	209	644	6J	680	1499	300	44	420 A A
	195/75R14	92H	196	648	5½J	630	1389	300	44	420 A A
	195/50R15	82V	201	577	6J	475	1074	300	44	420 A A
	185/55R15	82V	194	585	6J	475	1047	300	44	420 A A
	195/55R15	85V	201	595	6J	515	1135	300	44	420 A A
	175/60R15	81H	177	591	5J	462	1019	300	44	420 A A
	185/60R15	84H	189	603	5.5J	500	1102	300	44	420 A A
	195/60R15	88H	201	615	6J	560	1235	300	44	420 A A
	195/60R15	89H	201	640	6J	580	1279	300	44	420 A A
	205/60R15	91H	209	627	6J	615	1356	300	44	420 A A
	165/65R15	81H	170	595	5J	462	1019	300	44	420 A A
	175/65R15	84H	177	609	5J	500	1102	300	44	420 A A
16	185/65R15	88H	189	621	5.5J	560	1235	300	44	420 A A
	195/65R15	91H	201	635	6J	615	1356	300	44	420 A A
	205/65R15	94H	209	647	6J	670	1477	300	44	420 A A
	215/65R15	96H	221	661	6.5J	710	1565	300	44	420 A A
	205/70R15	96T	209	699	6J	710	1565	300	44	420 A A
	195/50R16	84V	201	602	6J	500	1102	300	44	420 A A
	175/55R16	80V	182	598	5½J	450	992	300	44	420 A A
	185/55R16	83V	194	610	6J	487	1074	300	44	420 A A
	195/55R16	87V	201	620	6J	545	1201	300	44	420 A A
	205/55R16	91V	214	632	6.5J	615	1356	300	44	420 A A
	215/55R16	93V	226	642	7J	650	1433	300	44	420 A A
	225/55R16	95V	233	654	7J	690	1521	300	44	420 A A
16	175/60R16	82H	177	616	5J	475	1047	300	44	420 A A
	205/60R16	92H	209	652	6J	630	1389	300	44	420 A A
	215/60R16	95H	221	664	6.5J	690	1521	300	44	420 A A
	225/60R16	98H	228	676	6.5J	750	1653	300	44	420 A A
16	205/65R16	95H	209	672	6J	690	1521	300	44	420 A A
	215/65R16	98H	221	661	6.5J	750	1653	300	44	420 A A



QUIET AS A GENTLEMAN, FEARLESS OF THE LIMIT, CONQUER EVERY BEND

PROXES UHP

ULTRA HIGH PERFORMANCE

SILENT NOISE REDUCTION

The variable pitch design reduces the resonance noise generated by the tread blocks and grooves between pitches during driving, thus improving ride comfort.



The tread rubber adopts a new upgraded formula of high grip and low rolling resistance, which ensures the hydrophilicity and adhesion of the tread rubber to the ground, reducing rolling resistance while significantly improving grip.




MORE PRECISE CONTROL

The outer wide groove design and the inner narrow groove design provide excellent drainage performance and improve the tire's wet handling performance.

STRONG BRAKING PERFORMANCE

The lightning rune design breaks up the airflow in the grooves and optimizes the noise of new energy vehicles; the continuous reinforcement rib design effectively increases braking stability and makes the braking response more timely.

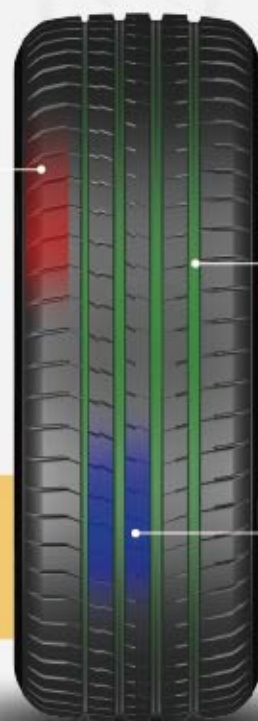

PROXES UHP

Ultra-high performance tires

In	Size	Load Index / Speed	S.W	O.D	RIM	Kg	LBS	KPA	PSI	UTQG
16	205/45R16	83W	206	590	7J	487	1074	300	44	480 A A
	215/45R16	90W XL	213	600	7J	600	1323	340	50	480 A A
17	205/40R17	84W XL	212	596	7.5J	500	1102	340	50	480 A A
	215/40R17	87W XL	218	604	7.5J	545	1201	340	50	480 A A
	205/45R17	88W XL	206	616	7J	560	1235	340	50	480 A A
	215/45R17	91W XL	213	626	7J	615	1356	340	50	480 A A
	225/45R17	94W XL	225	634	7.5J	670	1477	340	50	480 A A
	235/45R17	97W XL	236	644	8J	730	1609	340	50	480 A A
	245/45R17	99W XL	243	652	8J	775	1709	340	50	480 A A
	255/45R17	102W XL	255	662	8.5J	850	1874	340	50	480 A A
	205/50R17	93W XL	214	638	6.5J	650	1433	340	50	480 A A
	215/50R17	95W XL	226	648	7J	690	1521	340	50	480 A A
18	225/50R17	98W XL	233	658	7J	750	1653	340	50	480 A A
	235/50R17	100W XL	245	668	7.5J	800	1764	340	50	480 A A
	205/55R17	95W XL	214	658	6.5J	690	1521	340	50	480 A A
	215/55R17	94W	226	668	7J	670	1477	300	44	480 A A
	225/55R17	97W	233	680	7J	730	1609	300	44	480 A A
	235/55R17	103W XL	245	690	7.5J	875	1929	340	50	480 A A
	255/35R18	94W XL	260	635	9J	670	1477	340	50	480 A A
	285/35R18	101W XL	290	657	10J	825	1819	340	50	480 A A
	225/40R18	92W XL	230	637	8J	630	1389	340	50	480 A A
	235/40R18	95W XL	241	645	8.5J	690	1521	340	50	480 A A
19	245/40R18	97W XL	248	653	8.5J	730	1609	340	50	480 A A
	255/40R18	99W XL	260	661	9J	775	1709	340	50	480 A A
	215/45R18	93W XL	213	651	7J	650	1433	340	50	480 A A
	225/45R18	95W XL	225	659	7.5J	690	1521	340	50	480 A A
	235/45R18	98W XL	236	669	8J	750	1653	340	50	480 A A
	245/45R18	100W XL	243	677	8J	800	1764	300	50	480 A A
	255/45R18	103W XL	255	687	8.5J	875	1929	340	50	480 A A
	215/50R18	96W XL	226	673	7J	710	1565	340	50	480 A A
	225/50R18	99W XL	233	683	7J	775	1709	340	50	480 A A
	235/50R18	101W XL	245	693	7.5J	825	1819	340	50	480 A A
20	245/50R18	104W XL	253	703	7.5J	900	1984	340	50	480 A A
	255/50R18	106W XL	265	713	8J	950	2094	340	50	480 A A
	215/55R18	99W XL	226	693	7J	775	1709	340	50	480 A A
	225/55R18	102W XL	233	705	7J	850	1874	340	50	480 A A
	235/55R18	104W XL	245	715	7.5J	900	1984	340	50	480 A A
	255/55R18	109W XL	265	737	8J	1030	2271	340	50	480 A A
	265/30R19	93W XL	271	643	9.5J	650	1433	340	50	480 A A
	275/30R19	96W XL	278	649	9.5J	710	1565	340	50	480 A A
	225/35R19	88W XL	230	641	8J	560	1235	340	50	480 A A
	235/35R19	91W XL	241	647	8.5J	615	1356	340	50	480 A A
21	245/35R19	93W XL	248	655	8.5J	650	1433	340	50	480 A A
	255/35R19	96W XL	260	661	9J	710	1565	340	50	480 A A
	265/35R19	98W XL	271	669	9.5J	750	1653	340	50	480 A A
	275/35R19	100W XL	278	675	9.5J	800	1764	340	50	480 A A
	225/40R19	93W XL	230	663	8J	650	1433	340	50	480 A A
	235/40R19	96W XL	241	671	8.5J	710	1565	340	50	480 A A
	245/40R19	98W XL	248	679	8.5J	750	1653	340	50	480 A A
	255/40R19	100W XL	260	687	9J	800	1764	340	50	480 A A
	275/40R19	105W XL	278	703	9.5J	925	2039	340	50	480 A A
	285/40R19	107W XL	290	711	10J	975	2149	340	50	480 A A
22	225/45R19	96W XL	225	685	7.5J	710	1565	340	50	480 A A
	235/45R19	99W XL	236	695	8J	775	1709	340	50	480 A A
	245/45R19	102W XL	243	703	8J	850	1874	340	50	480 A A
	255/45R19	104W XL	255	713	8.5J	900	1984	340	50	480 A A
	235/50R19	103W XL	245	719	7.5J	875	1929	340	50	480 A A

PRODUCT INTRODUCTION



In	Size	Load Index /Speed	S.W	Q.D	RIM	Kg	LBS	KPA	PSI	UTQG
19	245/50R19	105W XL	253	729	7.5J	925	2039	340	50	480 A A
	255/50R19	107W XL	265	739	8J	975	2149	340	50	480 A A
	265/50R19	110W XL	277	749	8.5J	1060	2337	300	44	480 A A
	225/55R19	99W	233	731	7J	775	1709	340	50	480 A A
	235/55R19	105W XL	245	741	7.5J	925	2039	340	50	480 A A
	245/55R19	103W	253	753	7.5J	875	1929	340	50	480 A A
	255/55R19	111W XL	265	763	8J	1090	2403	340	50	480 A A
20	275/30R20	97W XL	278	674	9.5J	730	1609	340	50	480 A A
	225/35R20	90W XL	230	666	8J	600	1323	340	50	480 A A
	245/35R20	95W XL	248	680	8.5J	690	1521	340	50	480 A A
	255/35R20	97W XL	260	686	9J	730	1609	340	50	480 A A
	265/35R20	99W XL	271	694	9.5J	775	1709	340	50	480 A A
	275/35R20	102W XL	278	700	9.5J	850	1874	340	50	480 A A
	285/35R20	104W XL	290	708	10J	900	1984	340	50	480 A A
	295/35R20	105W XL	301	714	10.5J	925	2039	340	50	480 A A
	315/35R20	110W XL	320	728	11J	1060	2337	340	50	480 A A
	245/40R20	99W XL	248	704	8.5J	775	1709	340	50	480 A A
	255/40R20	101W XL	260	712	9J	825	1819	300	44	480 A A
	265/40R20	104W XL	271	720	9.5J	900	1984	300	44	480 A A
	275/40R20	106W XL	278	728	9.5J	950	2094	340	50	480 A A
	285/40R20	108W XL	290	736	10J	1000	2205	340	50	480 A A
	295/40R20	110W XL	301	744	10.5J	1060	2337	340	50	480 A A
	305/40R20	112W XL	313	752	11J	1120	2469	340	50	480 A A
	235/45R20	100W XL	236	720	8J	800	1764	340	50	480 A A
	245/45R20	103W XL	243	728	8J	875	1929	340	50	480 A A
	255/45R20	105W XL	255	738	8.5J	925	2039	340	50	480 A A
	265/45R20	108W XL	266	746	9J	925	2039	340	50	480 A A
21	275/45R20	10W XL	273	756	9J	1060	2337	340	50	480 A A
	285/45R20	112W XL	285	764	9.5J	1120	1120	340	50	480 A A
	235/50R20	104W XL	245	744	7.5J	900	900	300	50	480 A A
	245/50R20	105W XL	253	754	7.5J	925	925	340	50	480 A A
	255/50R20	109W XL	265	764	8J	1030	1030	340	50	480 A A
	265/50R20	111W XL	277	774	8.5J	1090	1090	340	50	480 A A
	275/50R20	113W XL	284	784	8.5J	1150	1150	340	50	480 A A
	285/50R20	116W XL	297	794	9J	1250	1250	340	50	480 A A
	235/55R20	105W XL	245	766	7.5J	925	925	340	50	480 A A
	255/55R20	110W XL	265	788	8J	1060	1060	340	50	480 A A
	275/55R20	117W XL	284	810	8.5J	1285	1285	340	50	480 A A
	275/30R21	98W XL	278	699	9.5J	750	750	340	50	480 A A
	285/30R21	100W XL	290	705	10J	800	800	340	50	480 A A
	305/30R21	104W XL	313	717	11J	900	900	340	50	480 A A
	315/30R21	105W XL	320	723	11J	925	925	340	50	480 A A
	325/30R21	108W XL	331	729	11.5J	1000	1000	340	50	480 A A
	245/35R21	96W XL	248	705	8.5J	710	710	340	50	480 A A
	255/35R21	98W XL	260	711	9J	750	750	340	50	480 A A
	265/35R21	101W XL	271	719	9.5J	825	825	340	50	480 A A
	275/35R21	103W XL	278	725	9.5J	875	875	340	50	480 A A
	285/35R21	105W XL	290	733	10J	925	925	340	50	480 A A
22	295/35R21	107W XL	301	739	10.5J	975	975	340	50	480 A A
	315/35R21	111W XL	320	753	11J	1090	1090	340	50	480 A A
	255/40R21	102W XL	260	737	9J	850	850	340	50	480 A A
	265/40R21	105W XL	271	745	9.5J	925	925	340	50	480 A A
	275/40R21	107W XL	278	753	9.5J	975	975	340	50	480 A A
	285/40R21	109W XL	290	761	10J	1030	1030	340	50	480 A A
	295/40R21	111W XL	301	769	10.5J	1090	1090	340	50	480 A A
	235/45R21	101W XL	236	745	8J	825	1819	340	50	480 A A
	245/45R21	104W XL	243	753	8J	900	1984	340	50	480 A A
	255/45R21	105W XL	255	763	8.5J	925	2039	340	50	480 A A
	265/45R21	108W XL	266	771	9J	1000	2205	340	50	480 A A

In	Size	Load Index /Speed	S.W	Q.D	RIM	Kg	LBS	KPA	PSI	UTQG
21	275/45R21	110W XL	273	781	9J	1060	2337	340	50	480 A A
	285/45R21	113W XL	285	789	9.5J	1150	2535	340	50	480 A A
	255/50R21	109W XL	265	789	8J	1030	2271	300	44	480 A A
	275/50R21	113W XL	284	809	8.5J	1150	2535	340	50	480 A A
	285/35R22	106W XL	290	759	10J	950	2094	340	50	480 A A
	315/35R22	111W XL	320	779	11J	1090	2403	340	50	480 A A
	265/40R22	106W XL	271	771	9.5J	950	2094	340	50	480 A A
22	275/40R22	107W XL	278	779	9.5J	975	2149	340	50	480 A A
	285/40R22	110W XL	290	787	10J	1060	2337	340	50	480 A A
	295/40R22	112W XL	301	795	10.5J	1120	2469	340	50	480 A A
	305/40R22	114W XL	313	803	11J	1180	2601	340	50	480 A A
	325/40R22	118W XL	331	819	11.5J	1320	2910	340	50	480 A A
	255/45R22	107W XL	255	789	8.5J	975	2149	340	50	480 A A
	275/45R22	112W XL	273	807	9J	1120	2469	340	50	480 A A
	285/45R22	114W XL	285	815	9.5J	1180	2601	340	50	480 A A
	275/50R22	111W	284	835	8.5J	1090	2403	340	50	480 A A
19	255/60R19	/	/	/	/	/	/	340	44	480 A A
	245/30R20	/	/	/	/	/	/	340	44	480 A A
	295/30R20	/	/	/	/	/	/	340	50	480 A A
	235/35R20	/	/	/	/	/	/	340	50	480 A A
	325/35R20	/	/	/	/	/	/	340	50	480 A A
	215/45R20	/	/	/	/	/	/	340	50	480 A A
	295/45R20	/	/	/	/	/	/	340	50	480 A A
20	275/60R20	/	/	/	/	/	/	340	50	480 A A
	255/30R21	/	/	/	/	/	/	340	50	480 A A
	295/30R21	/	/	/	/	/	/	340	50	480 A A
	245/40R21	/	/	/	/	/	/	340	50	480 A A
	315/40R21	/	/	/	/	/	/	340	50	480 A A
	295/30R22	/	/	/	/	/	/	300	50	480 A A
	315/30R22	/	/	/	/	/	/	340	50	480 A A
22	265/35R22	/	/	/	/	/	/	340	50	480 A A
	275/35R22	/	/	/	/	/	/	340	50	480 A A
	295/35R22	/	/	/	/	/	/	340	50	480 A A



URBAN TRAVEL, LET SUV LIVE ITS TRUE PURPOSE

PREMIUM HT

HIGHWAY TERRAIN

PREMIUM HT

Urban off-road tires

In	Size	Load Index /Speed	S.W	O.D	RIM	Kg	LBS	KPA	PSI
16	235/60R16	100H	240	688	7J	800	1764	300	44
	215/70R16	100H	221	708	6 1/2J	800	1764	300	44
	225/70R16	103H	228	722	6 1/2J	875	1929	300	44
	235/70R16	106H	240	736	7J	950	2094	300	44
	245/70R16	107H	248	750	7J	975	2149	300	44
	265/70R16	112H	272	778	8J	1120	2469	300	44
17	215/60R17	96H	221	690	6 1/2J	710	1565	300	44
	225/60R17	99H	228	702	6 1/2J	775	1709	300	44
	235/60R17	102H	240	714	7J	850	1874	300	44
	215/65R17	99H	221	712	6 1/2J	775	1709	300	44
	225/65R17	102H	228	724	6 1/2J	850	1874	300	44
	235/65R17	104H	240	738	7J	900	1984	300	44
	245/65R17	107H	248	750	7J	975	2149	300	44
	235/55R18	100V	245	715	7 1/2J	800	1764	300	44
18	225/60R18	100H	228	727	6 1/2J	800	1764	300	44
	235/60R18	103H	240	739	7J	975	2149	300	44
	245/60R18	105H	248	751	7J	875	1929	300	44
	265/60R18	110H	272	775	8J	1060	2337	300	44
	235/65R18	106H	240	763	7J	950	2094	300	44
	235/60R19	103H	240	765	7J	875	1929	300	44
19	235/65R19	109XL H	240	789	7J	1030	2271	340	50

EXCELLENT WET HANDLING PERFORMANCE

Four wide longitudinal main grooves provide excellent drainage performance and improve the tire's wet handling performance.

PROVIDE STRONG TRACTION

The large-angle oblique pattern and continuous central ribs not only ensure the rigidity of the pattern blocks, but also provide strong traction and braking performance.



EXCELLENT GRIP ON WET ROADS

The zigzag steel sheet increases the microscopic bite points of the tire tread and improves the grip on ice, snow and wet roads.

The newly upgraded green ultra-high performance tread formula effectively reduces rolling resistance and has outstanding energy-saving performance.



NO DEFORMATION UNDER HEAVY PRESSURE AND NO MARKS LEFT BY BUMPS

CARGO VAN

COMMERCIAL

CARGO VAN


Special tires for urban light trucks

In	Size	Ply Rating	Load Index /Speed	S.W	O.D	RIM	Kg	LBS	KPA	PSI
13	165R13C	6PR	91/89Q	167	596	4.5J	615/580	1355/1280	375	55
	175R13C	8PR	97/95Q	178	608	5J	730/690	1610/1520	450	65
14	165R14C	6PR	93/91Q	167	622	4.5J	650/615	1435/1355	375	55
	175R14C	6PR	96/94Q	178	634	5J	710/670	1565/1475	375	55
	185R14C	8PR	102/100Q	188	650	5.5J	850/800	1875/1765	450	65
	195R14C	8PR	106/104Q	198	666	5.5J	950/900	2095/1985	450	65
	205R14C	8PR	109/107Q	208	686	6J	1030/975	2270/2150	450	65
	175/70R14C	6PR	95/93Q	177	602	5J	690/650	1520/1435	375	55
15	185R15C	8PR	103/102Q	188	674	5.5J	875/850	1930/1875	450	65
	195R15C	8PR	106/104R	198	690	5.5J	950/900	2095/1985	450	65
	195/70R15C	8PR	104/102Q	201	655	6J	900/850	1985/1875	450	65
	205/70R15C	8PR	106/104Q	209	669	6J	950/900	2095/1985	450	65
	215/70R15C	8PR	109/107Q	221	683	6.5J	1030/975	2270/2150	450	65
	205R16C	8PR	110/108R	208	736	6J	1060/1000	2335/2205	450	65
16	225/65R16C	8PR	112/110R	228	698	6.5J	1120/1060	2470/2335	475	69
	235/65R16C	8PR	115/113R	240	712	7J	1215/1150	2680/2535	475	69
	215/70R16C	6PR	108/106R	221	708	6.5J	1000/950	2205/2095	375	55
	185/75R16C	8PR	104/102R	184	684	5J	900/850	1985/1875	475	69
	195/75R16C	8PR	107/105R	196	698	5.5J	975/925	2150/2040	475	69
	205/75R16C	8PR	110/108R	203	714	5.5J	1060/1000	2335/2205	475	69
	215/75R16C	8PR	113/111R	216	728	6J	1150/1090	2535/2405	475	69

ENHANCE THE DRIVE FOR EXCELLENCE

Three serpentine fold lines lead to the main groove, taking into account drainage performance and providing excellent driving force.

The new tear-resistant and wear-resistant formula design effectively improves the wear resistance of the tread rubber while taking into account the rolling resistance. While improving the vehicle's carrying capacity, the tire is more fuel-efficient, energy-efficient and has a longer mileage.

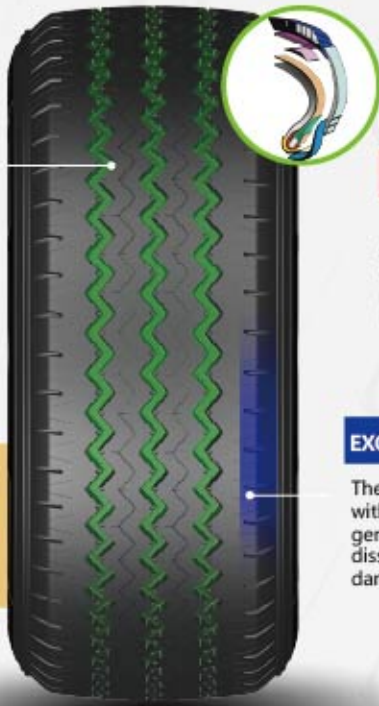

STRONG STRUCTURE AND SOLID CARCASS

High-strength nylon cap layer + double-layer steel belt layer + double-layer polyester carcass cord + reinforced toe design enhances tread rigidity and carcass strength, improving load-bearing capacity.

EXCELLENT HEAT DISSIPATION PERFORMANCE

The shoulder heat dissipation groove is matched with low heat generation base rubber and low heat generation wing rubber to ensure excellent heat dissipation of the tire and prevent tire shoulder damage.



THE COURAGE THAT CANNOT BE CUT
BY GRAVEL STARTS FROM THE TIRE TREAD

X-ATPRO
ALL-TERRAIN

PROVIDE STRONG GRIP

The center of the tread adopts a continuous or discontinuous longitudinal pattern, and adds small sipe patterns to enhance the grip on wet roads.

EXCELLENT OFF-ROAD PERFORMANCE

Deep grooves and serrated edges or "biting teeth" on the shoulders provide additional traction on low-grip surfaces.



DOUBLE PROTECTION IS SAFER

Adopting "three-dimensional grooves" to add micro grooves inside the tread blocks, further optimizing mud removal performance and improving driving stability.

Upgraded classic tear-resistant formula to ensure the grip performance of the tread rubber and greatly improve the tear resistance of the tire.

X-ATPRO

Extreme off-road tires

In	Size	Ply Rating	Load Index /Speed	B/W	S.W	O.D	RIM	Kg	LBS	KPA	PSI
15	LT215/75R15	6PR	100/97Q	B	216	703	6J	800/730	1765/1610	350	51
	LT235/75R15	6PR	104/101Q	B	235	733	6½J	900/825	1985/1820	350	51
	31*10.50R15LT	6PR	109Q	B	268	775	8½J	1030	2270	350	51
16	LT215/70R16	6PR	100/97Q	B	221	708	6½J	800/730	1765/1610	350	51
	LT225/70R16	6PR	102/99Q	B	228	722	6½J	850/775	1875/1710	350	51
	LT235/70R16	8PR	110/107Q	B	240	736	7J	1060/975	2335/2150	450	65
	LT245/70R16	10PR	118/115Q	B	248	750	7J	1320/1215	2910/2680	550	80
	LT255/70R16	10PR	120/117Q	B	260	764	7½J	1400/1285	3085/2835	550	80
	LT265/70R16	10PR	121/118Q	W	272	778	8J	1450/1320	3195/2910	550	80
	LT275/70R16	8PR	119/116Q	W	279	792	8J	1360/1250	3000/2755	450	65
	LT245/75R16	10PR	120/116Q	W	248	774	7J	1400/1250	3085/2755	550	80
	LT265/75R16	10PR	123/120Q	W	267	804	7½J	1550/1400	3415/3085	550	80
	LT285/75R16	10PR	126/123Q	W	286	834	8J	1700/1550	3750/3415	550	80
17	LT225/65R17	8PR	107/103Q	B	228	724	6½J	975/875	2150/1930	450	65
	LT235/65R17	8PR	109/105Q	B	240	738	7J	1030/925	2270/2040	450	65
	LT245/65R17	8PR	111/108Q	B	248	750	7J	1090/1000	2405/2205	450	65
	LT265/65R17	10PR	120/117Q	W	272	776	8J	1400/1285	3085/2835	550	80
	LT275/65R17	10PR	121/118Q	W	279	790	8J	1450/1320	3195/2910	550	80
	LT285/65R17	10PR	121/118Q	W	292	802	8½J	1450/1320	3195/2910	550	80
	LT245/70R17	10PR	119/116Q	W	248	776	7J	1360/1250	3000/2755	550	80
	LT265/70R17	10PR	121/118Q	W	272	804	8J	1450/1320	3195/2910	550	80
	LT275/70R17	10PR	121/118Q	W	279	818	8J	1450/1320	3195/2910	550	80
	LT285/70R17	10PR	126/123Q	W	292	832	8½J	1700/1550	3750/3415	550	80
18	LT315/70R17	10PR	126/123Q	W	323	874	9½J	1700/1550	3750/3415	450	65
	35*12.50R17LT	10PR	121Q	W	318	877	10J	1450	3195	450	65
	37*12.50R17LT	8PR	124Q	W	318	928	10J	1600	3525	350	50
	LT235/60R18	8PR	108/104S	B	240	739	7J	1000/900	2205/1985	450	65
	LT255/60R18	10PR	117/114S	B	260	763	7.5J	1285/1180	2835/2600	550	80
	LT265/60R18	10PR	119/116S	W	272	775	8J	1360/1250	3000/2755	550	80
	LT285/60R18	10PR	122/119S	W	292	799	8½J	1500/1360	3305/3000	550	80
	LT235/65R18	8PR	113/110S	B	240	763	7J	1150/1060	2535/2335	450	65
	LT265/65R18	10PR	122/119S	W	272	801	8J	1500/1360	3305/3000	550	80
	LT275/65R18	10PR	123/120S	W	279	815	8J	1550/1400	3415/3085	550	80
19	LT285/65R18	10PR	125/122S	W	292	827	8½J	1650/1500	3640/3305	550	80
	LT265/70R18	10PR	124/121Q	W	272	829	8J	1600/1450	3525/3195	550	80
	LT275/70R18	10PR	125/122Q	W	279	843	8J	1650/1500	3640/3305	550	80
	LT285/70R18	10PR	127/124Q	W	292	857	8½J	1750/1600	3860/3525	550	80
	LT245/55R19	10PR	113/110S	B	253	753	7.5J	1150/1060	2535/2335	550	80
	LT255/55R19	10PR	115/112S	B	265	763	8J	1215/1120	2680/2470	550	80
	LT265/55R19	10PR	116/113S	B	277	775	8.5J	1250/1150	2755/2535	550	80
	LT235/60R19	8PR	109/106S	B	240	765	7J	1030/950	2270/2094	450	65
	LT255/60R19	8PR	116/113S	B	260	789	7.5J	1250/1150	2755/2535	450	65
	LT275/55R20	10PR	120/117S	B	284	810	8.5J	1400/1285	3085/2835	550	80
20	LT275/60R20	10PR	123/120S	B	279	838	8J	1550/1400	3415/3085	550	80
	LT265/45R21	8PR	111/108S	B	266	771	9J	1090/1000	2405/2205	450	65
21	LT275/50R21	8PR	116/113S	B	284	809	8.5J	1250/1150	2755/2535	450	65

PRODUCT INTRODUCTION



In	Size	Ply Rating	Load Index /Speed	B/W	S.W	OD	RIM	Kg	LBS	KPA	PSI
15	215/75R15	/	100T	B	216	703	6J	800	1765	350	51
	235/75R15	/	105T	B	235	733	6½J	925	2039	350	51
16	215/70R16	/	100T	B	221	708	6½J	800/730	1765/1610	350	51
	225/70R16	/	103T	B	228	722	6½J	875	1929	350	51
	235/70R16	/	106T	B	240	736	7J	950	2094	350	51
	245/70R16	/	107T	B	248	750	7J	975	2149	350	51
	255/70R16	/	111T	B	260	764	7½J	1090	2403	350	51
	265/70R16	/	112T	W	272	778	8J	1120	2469	350	51
	275/70R16	/	114T	W	279	792	8J	1180	2601	350	51
17	215/60R17	/	100XL H	B	221	690	6½J	800	1764	340	50
	225/60R17	/	103XL H	B	228	702	6½J	875	1929	340	50
	225/65R17	/	102T	B	228	724	6½J	850	1875	350	51
	235/65R17	/	104T	B	240	738	7J	900	1984	350	51
	245/65R17	/	107T	B	248	750	7J	975	2149	350	51
	265/65R17	/	112T	W	272	776	8J	1120	2469	350	51
	245/70R17	/	110T	W	248	776	7J	1060	2337	350	51
18	265/70R17	/	115T	W	272	804	8J	1215	2679	350	51
	225/55R18	/	102 XL H	B	233	705	7J	850	1874	340	50
	235/55R18	/	104 XL H	B	245	715	7½J	900	1984	340	50
	225/60R18	/	104 XL H	B	228	727	6½J	900	1984	340	50
	265/60R18	/	110T	W	272	775	8J	1060	2337	350	51
	285/60R18	/	116T	W	292	799	8½J	1250	2759	350	51
	275/65R18	/	116T	W	279	815	8J	1250	2756	350	51
19	235/55R19	/	105 XL	B	245	741	7½J	925	2039	340	50
20	265/50R20	/	107T	B	277	774	8.5J	975	2149	350	51
	275/55R20	/	113T	B	284	810	8.5J	1150	2535	350	51
	275/60R20	/	115T	B	279	838	8J	1215	2679	350	51

In	Size	Ply Rating	Load Index /Speed	B/W	S.W	OD	RIM	Kg	LBS	KPA	PSI
15	33*12.50R15LT	/	108Q	W	318	826	10J	1000	2250	340	50
	LT225/70R15	/	100/97Q	W	228	699	6½J	800/730	1753/1609	350	55
	LT225/75R15	/	108/104Q	W	223	719	6J	1150/1250	2755/2535	550	80
	P235/75R15	/	105XL T	W	235	733	6½J	920	2028	245	35
16	LT215/65R16	/	109/105Q	W	221	686	6½J	800/875	1930/1765	450	65
	LT235/65R16	/	108/104Q	W	240	712	7J	1000/900	2205/1984	450	65
	LT215/75R16	/	107/103Q	W	216	728	6J	975/875	2149/1929	450	65
	LT235/85R16	/	120/116Q	W	235	806	6.5J	720/790	1700/1545	550	80
17	33*12.50R17LT	/	120Q	W	318	826	10J	1600	3525	550	80
	40*13.50R17LT	/	121Q	W	345	1004	11J	1800	3970	350	50
	P225/65R17	/	102XL T	W	228	724	6½J	925	2039	340	50
	LT255/65R17	/	114/110Q	W	260	764	7½J	1060/1180	2600/2335	450	65
	LT295/70R17	/	121/118Q	W	299	846	8½J	1650/1800	3970/3640	550	80
	LT305/70R17	/	121/118Q	W	311	860	9J	1500/1650	3640/3305	450	65
18	36*13.50R18LT	/	121Q	W	345	902	11J	1450	3195	350	50
	LT215/55R18	/	/	B	/	/	/	/	/	/	/
	LT245/60R18	/	/	W	/	/	/	/	/	/	/
19	LT275/55R19	/	/	B	/	/	/	/	/	/	/
	LT235/60R19	/	/	W	/	/	/	/	/	/	/
	LT235/65R19	/	/	W	/	/	/	/	/	/	/
20	33*12.50R20LT	/	114Q	W	318	826	10J	1180	2600	450	65
	35*12.50R20LT	/	121Q	W	318	877	10J	1450	3195	450	65
	LT245/45R20	/	/	B	/	/	/	/	/	/	/
	LT235/55R20	/	/	B	/	/	/	/	/	/	/
	LT255/55R20	/	/	B	/	/	/	/	/	/	/
	LT265/55R20	/	/	B	/	/	/	/	/	/	/
	LT305/55R20	/	121/118Q	B	316	844	9½J	1320/1450	3195/2910	450	65
21	LT255/60R20	/	/	W	/	/	/	/	/	/	/
	LT265/60R20	/	121/118Q	W	272	826	8J	1320/1450	3195/2910	550	80
	LT275/45R21	/	/	B	/	/	/	/	/	/	/
	LT265/40R22	/	/	B	/	/	/	/	/	/	/
	LT275/40R22	/	/	B	/	/	/	/	/	/	/
	LT285/40R22	/	/	B	/	/	/	/	/	/	/
	LT295/40R22	/	/	B	/	/	/	/	/	/	/
22	LT305/40R22	/	115/112Q	B	313	803	11J	1120/1215	2680/2470	550	/
	LT265/45R22	/	/	B	/	/	/	/	/	/	/
	33*12.50R22LT	/	109Q	W	318	826	10J	1030	2270	450	65
	LT265/50R22	/	/	B	/	/	/	/	/	/	/



STEADFASTLY ACCOMPANY YOU
AND REASSURE EVERY JOURNEY

RAZR HP
HIGH PERFORMANCE

WET GRIP

Wide tread design+4 wide longitudinal main grooves, under the premise of ensuring the effective ground contact area of the tire, provides the tire with superior drainage performance and improves handling performance of the tire on dry and wet road.

PRECISE HANDLING

Real dual-layers of carcass+ asymmetric pattern design, which ensures strong sidewall support while improving handling performance through the rigidity of the outertread pattern, making steering safer.



DRY GRIP

Wide tread width: Industry-leading wide tread width design ensures excellent grip.

The green, environmentally friendly and energy-saving tread formula effectively reduces rolling resistance and extends vehicle driving time while ensuring the wear resistance of the tires.

RAZR HP

Green high-performance tires

In	Size	Load Index /Speed	S.W	O.D	RIM	Kg	LBS	KPA	PSI	UTQG
13	155/80R13	79T	157	579	4.50B	437	963	300	44	420 A A
	165/65R13	77T	174	540	5.00B	412	908	300	44	420 A A
	165/70R13	79T	170	562	5.00B	437	963	300	44	420 A A
	175/70R13	82T	183	672	5.00B	475	1047	300	44	420 A A
	185/70R13	86T	189	590	5.50B	530	1168	300	44	420 A A
14	165/65R14	79H	174	566	5J	437	963	300	44	420 A A
	175/65R14	86T XL	188	582	5J	530	1168	340	50	420 A A
	175/70R14	84T	180	598	5J	500	1102	300	44	420 A A
	185/60R14	82H	195	574	5½J	475	1047	300	44	420 A A
	185/65R14	86H	198	594	5½J	530	1168	300	44	420 A A
15	185/70R14	88H	188	612	5½J	565	1246	300	44	420 A A
	195/70R14	91H	201	630	6J	615	1356	300	44	420 A A
	185/55R15	82V	200	581	6J	475	1047	300	44	420 A A
	185/60R15	88H XL	195	600	5½J	560	1235	340	50	420 A A
	185/65R15	88H	195	618	5½J	560	1235	300	44	420 A A
16	195/65R15	91H	210	633	6J	615	1356	300	44	420 A A
	195/55R15	85V	206	592	6J	515	1135	300	44	420 A A
	195/60R15	88V	201	615	6J	580	1279	300	44	420 A A
	195/50R15	82V	201	577	6J	475	1047	300	44	420 A A
	205/65R15	94H	209	647	6J	670	1477	300	44	420 A A
17	195/60R16	89H	201	640	6J	690	1521	300	44	420 A A
	205/55R16	91V	219	628	6½J	630	1389	300	44	420 A A
	205/60R16	92V	209	652	6J	560	1235	300	44	420 A A
	205/65R16	95H	209	672	6J	690	1521	300	44	420 A A
	215/60R16	95V	233	659	6½J	615	1356	300	44	420 A A



NO DEFORMATION UNDER LOAD,
WEAR-RESISTANT, PUNCTURE-PROOF, ANTI-SLIP

C-PRO
COMMERCIAL

C-PRO

Special tires for urban light trucks

In	Size	Load Index Speed	S.W	O.D	RIM	Kg	LBS	KPA	PSI
13	155R13C	90/88R	157	578	4.50B	600/560	1325/1235	450	65
	165R13C	91/89Q	167	596					
14	185R14C	102/100Q	188	650	5 1/2J	850/800	1875/1765	450	65
	195R14C	106/104Q	198	666	5 1/2J	950/900	2095/1985	450	65
	215/75R14C	112/110R	216	678					
	195R15C	106/104Q	198	690	5 1/2J	950/900	2095/1985	450	65
15	195/70R15C	104/102R	201	655	5 1/2J	975/925	2150/2040	475	69
	205/70R15C	106/104R	209	669	6J	950/900	2095/1985	450	65
	215/70R15C	109/107R	221	683					
	225/70R15C	112/110S	228	697	6 1/2J	1120/1060	2470/2340	450	65
	205R16C	110/108S	208	736	6J	1060/1000	2340/2205	450	65
16	185/75R16C	104/102Q	184	684	5J	900/850	1985/1875	475	69
	195/75R16C	107/105R	196	698	5 1/2J	975/925	2150/2040	475	69
	215/75R16C	116/114R	216	728					
	235/65R16C	115/113R	240	712	7J	1215/1150	2680/2535	475	69

THREE STEPPED LONGITUDINAL GROOVE DESIGN

The Zigzag pattern main grooves design ensures excellent anti-hydroplaning performance and improves wet grip.

Using high-strength steel wire and cap layer in tire structure to make the tire stronger and enhance the reliability and durability.



STRONGER CARCASS

The strengthened carcass and thicker sidewall make the tire stronger with better bearing capacity and puncture resistant

WEAR RESISTANT

Deep pattern grooves and high wear-resistant tread compound, ensures excellent wear resistance.



MADE FOR OFF-ROAD USE, IT ENSURES
STRONG PERFORMANCE ACROSS TOUGH LANDSCAPES.

MUD MONSTER
ALL-TERRAIN

MUD MONSTER Extreme off-road tires

BRAND	SIZE	LI&SS	PR	BRAND	SIZE	LI&SS	PR
LCH BLACK	LT235/75R15	116/113Q	12PR	LCH BLACK	LT275/55R20	120/117Q	12PR
LCH BLACK	31X10.50R15LT	109Q	12PR	LCH BLACK	35X12.50R22LT	121Q	12PR
LCH BLACK	33X12.50R15LT	108Q	12PR	LCH BLACK	27X8.50R14LT	95Q	8PR
LCH BLACK	LT245/75R16	123/120Q	12PR	LCH BLACK	LT215/75R15	106/103Q	8PR
LCH BLACK	LT255/70R16	120/117Q	12PR	LCH BLACK	35X12.50R20LT	125Q	12PR
LCH BLACK	LT265/75R16	123/120Q	12PR	LCH BLACK	27X8.50R14LT	95Q	8PR
LCH BLACK	LT285/75R16	126/123Q	12PR	LCH BLACK	LT215/75R15	100/97Q	8PR
LCH BLACK	LT265/70R17	123/120Q	12PR	LCH BLACK	235/70R16	109R XL	/
LCH BLACK	LT285/70R17	126/123Q	12PR	LCH BLACK	265/65R17	112S	/
LCH BLACK	35X12.50R17LT	128Q	12PR	LCH BLACK	LT265/60R18	119/116Q	10PR
LCH BLACK	37X13.50R17LT	128Q	12PR	LCH BLACK	33X12.50R17LT	114Q	12PR
LCH BLACK	LT275/70R18	128/126Q	12PR	LCH BLACK	35X12.50R18LT	123Q	12PR
LCH BLACK	35X12.50R18LT	128Q	12PR	LCH BLACK	33X12.50R20LT	119Q	12PR
LCH BLACK	LT305/55R20	125/122Q	12PR	LCH BLACK	35X12.50R20LT	125Q	12PR

AGGRESSIVE TREAD DESIGN

It boasts deep grooves and large tread blocks,maximizing traction in mud, dirt, and rocky terrains.



The tire ensures enhanced grip, making itideal for slippery and uneven surfaces, providing a stable ride.

RUGGED CONSTRUCTION

The casing and sidewalls are built to resist punc-tures and impacts, ensuring reliability in off-road adventures.

ENHANCED DURABILITY

Constructed with high-quality materials, it offers ex-ceptional longevity and performance, withstanding the harshest conditions.

AT100



BRAND	SIZE	LI&SS	PR	SIDEWALL
LCH T-REX	LT175/70R14	98/96S	10PR	OWL/BW
LCH T-REX	P215/70R16	100T	/	OWL/BW
LCH T-REX	LT215/70R16	106/103Q	8PR	OWL/BW
LCH T-REX	P245/70R16	107R	/	OWL/BW
LCH T-REX	LT245/70R16	113/110Q	8PR	OWL/BW
LCH T-REX	LT265/70R16	121/118R	10PR	OWL/BW
LCH T-REX	225/65R17	102T	/	OWL/BW
LCH T-REX	LT225/65R17	107/103S	8PR	OWL/BW
LCH T-REX	LT265/65R17	120/117S	10PR	OWL/BW
LCH T-REX	P265/70R17	115T	/	OWL/BW
LCH T-REX	LT265/70R17	121/118R	10PR	OWL/BW
LCH T-REX	LT275/70R17	121/118S	10PR	OWL/BW
LCH T-REX	LT285/70R17	121/118S	10PR	OWL/BW
LCH T-REX	LT265/50R20	116/113S	8PR	OWL/BW
LCH T-REX	LT275/55R20	120/117S	10PR	OWL/BW
LCH T-REX	265/50R20	107T	/	OWL/BW
LCH T-REX	LT275/45R21	113/110S	10PR	OWL/BW
LCH T-REX	LT285/45R22	117/114S	10PR	OWL/BW

RURAL BLOCK



BRAND	SIZE	LI&SS	PR
LCH MAXX	LT245/75R16	120/116Q	12PR
LCH MAXX	LT265/75R16	123/120Q	12PR
LCH MAXX	LT235/75R15	116/113Q	8PR
LCH MAXX	31x10.50R15LT	109Q	8PR
LCH MAXX	27x8.50R14LT	95Q	8PR
LCH MAXX	LT265/70R17	121/118Q	12PR
LCH MAXX	215/70R15LT	109/107R	6PR
LCH MAXX	205/75R14	109/107R	6PR

EXTREME PRO



BRAND	SIZE	LI&SS	PR
LCH T-REX	205/70R14 XL	98S	/
LCH T-REX	27x8.50R14LT	95Q	8PR
LCH T-REX	LT215/75R15	100/97Q	8PR
LCH T-REX	LT235/75R15	104/101Q	8PR
LCH T-REX	31x10.50R15LT	109Q	6PR
LCH T-REX	235/70R16 XL	109R	/
LCH T-REX	245/75R16	111S	/
LCH T-REX	255/70R16	111S	/
LCH T-REX	265/75R16	116S	/
LCH T-REX	LT265/75R16	123/120Q	10PR
LCH T-REX	225/65R17 XL	108H	/
LCH T-REX	265/65R17	112S	/
LCH T-REX	265/70R17	115S	/
LCH T-REX	LT265/70R17	121/118S	10PR
LCH T-REX	LT265/60R18	119/116Q	10PR
LCH T-REX	LT275/65R18	123/120R	10PR
LCH T-REX	LT275/55R20	120/117Q	8PR
LCH T-REX	33x12.50R20LT	119Q	12PR
LCH T-REX	33x12.50R22LT	114Q	12PR

SAFARI A/T



BRAND	SIZE	LI&SS	PR
LCH T-REX	215R15C	109/107S	8PR
LCH T-REX	255/70R15C	112/110S	6PR
LCH T-REX	205R16C	110/108S	8PR
LCH T-REX	265/70R16	112S	/
LCH T-REX	265/65R17	112S	/

DEPREDADOR



BRAND	SIZE	LI&SS	PR
LCH GRIPPER	LT235/75R15	116/113Q	10PR
LCH GRIPPER	31x10.50R15LT	109Q	10PR
LCH GRIPPER	33x12.50R15LT	108Q	8PR
LCH GRIPPER	LT245/75R16	120/116Q	12PR
LCH GRIPPER	LT265/75R16	123/120Q	12PR
LCH GRIPPER	LT285/75R16	126/123Q	12PR
LCH GRIPPER	LT265/70R17	121/118Q	12PR
LCH GRIPPER	LT285/70R17	121/118Q	10PR
LCH GRIPPER	33x12.5R17LT	114Q	12PR
LCH GRIPPER	33x12.50R18LT	122Q	12PR
LCH GRIPPER	33x12.50R20LT	119Q	12PR
LCH GRIPPER	LT275/60R20	119/116Q	12PR
LCH GRIPPER	P275/60R20	115T	/
LCH GRIPPER	35x12.50R20LT	125Q	12PR
LCH GRIPPER	33x12.50R22LT	114Q	12PR
LCH GRIPPER	35x12.50R22LT	121Q	12PR

ALL-TERRAIN A/T



BRAND	SIZE	LI&SS	PR	SIDEWALL
LCH T-REX	31x10.50R15LT	109Q	10PR	OWL/BW
LCH T-REX	255/70R15C	112/110S	6PR	OWL/BW
LCH T-REX	235/70R16	109Q	/	OWL/BW
LCH T-REX	255/70R16	111S	/	OWL/BW
LCH T-REX	245/75R16	111S	/	OWL/BW
LCH T-REX	265/75R16	116S	/	OWL/BW
LCH T-REX	LT265/75R16	123/120Q	10PR	OWL/BW
LCH T-REX	265/70R16	112S	/	OWL/BW
LCH T-REX	265/65R17	112S	/	OWL/BW
LCH T-REX	33x12.50R20LT	119Q	12PR	OWL/BW
LCH T-REX	33x12.50R22LT	114Q	12PR	OWL/BW

SP ROAD GRIPPER S



BRAND	SIZE	LI&SS	PR
LCH T-REX	LT235/85R16	123/120S	12PR
LCH T-REX	LT235/85R16	108/104S	6PR

CUSTOM 07



BRAND	SIZE	LI&SS	PR
LCH CLASSIC	275/60R15	107S	/

RM-777



BRAND	SIZE	LI&SS	PR
LCH T-REX	205/75R16C	113/111R	10PR

ALL-TERRAIN T/A



BRAND	SIZE	LI&SS	PR
LCH T-REX	215/70R16	100T	/
LCH T-REX	225/65R17	102T	/
LCH T-REX	LT245/75R16	120/116S	10PR
LCH T-REX	LT265/75R16	123/120Q	10PR
LCH T-REX	255/70R16	111S	/
LCH T-REX	LT175/70R14	98/96S	10PR
LCH T-REX	265/70R15	112T	/
LCH T-REX	31X10.50R15LT	109Q	10PR
LCH T-REX	235/70R16	108T	/
LCH T-REX	275/70R16	114T	/
LCH T-REX	LT275/70R16	119/116Q	8PR
LCH T-REX	205/75R15	98T	/
LCH T-REX	P265/70R17	115T	/
LCH T-REX	LT265/70R17	121/118R	10PR
LCH T-REX	285/50R20	116H	/
LCH T-REX	285/60R18	120H	/
LCH T-REX	LT275/70R17	121/118S	10PR
LCH T-REX	175/80R14	92T	/
LCH T-REX	LT175/80R14	97/94S	8PR
LCH T-REX	195R15C	106/104R	8PR

RADIAL G/T



BRAND	SIZE	LI&SS	PR
LCH CLASSIC	P295/50R15 (WHITE LETTER)	108H	/
MAXCHEE	P295/50R15 (BLACK LETTER)	108H	/

MT-05



BRAND	SIZE	LI&SS	PR
LCH MILITAR	750-17	121/116L	14PR
LCH MILITAR	700-14	/	8PR

TIRE MAINTENANCE GUIDE

Proper vehicle maintenance and tire care is necessary to obtain expected life of a tire.


It is your obligation to properly maintain your tires and the vehicle upon which they are mounted, including:

- (a) operating your tires at the inflations recommended by the vehicle manufacturer;
- (b) keeping your tire/wheel assemblies in balance;
- (c) proper wheel alignment, and;
- (d) rotating your tires every 5,000-6,000 miles.


APPROVED ROTATION PATTERNS

When rotating tires with a directional pattern or of different sizes, please refer to the vehicle manufacturer's rotation procedures as found in the vehicle owner's manual.

Front Wheel
Drive
FRONT

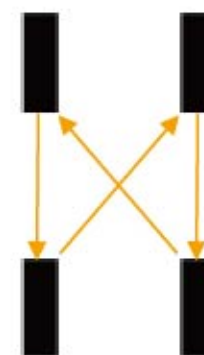

Rear Wheel
Drive
FRONT

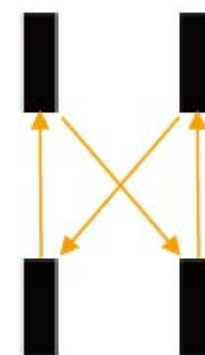

Four Wheel
Drive
FRONT



Alternate
FRONT

